



Renaissance FP Price List USA - BDI - July 6th, 2026 - Tariffs included in the prices




Contents

EF-RUP600.....	2
EF-RL50.....	4
EF-RR1000C.....	6
EF-RR1500C.....	8
Options.....	10
Summary.....	12


Uptown 600 Fireplace



Magnificent 600in2 view of the fire



Requires a choice of trim



TECHNICAL SPECIFICATIONS

Emissions:	EPA Phase 2 Qualified at 4.8 grams/kg of wood burned
	EPA Qualified as per test protocol ASTM 2558 "Standard test method for determining particulate matter emissions from fires in low mass wood-burning fireplaces".
	The Uptown 600 can be sold in Canada and the USA since it is not regulated as per the rule definition of "fireplace" under Subpart AAA of the 2015 EPA Standards of Performance for New Residential Wood Heaters Vol. 80, No. 50.
Size of Firebox:	28 1/2"W x 13"D
HRS (Heat Recovery System)	Included with fireplace
Maximum Log Size:	24"
Door & Screen	Guillotine Glide-Rail System
Glass Viewing Area:	28 1/2" W x 20 3/8" H
Venting:	8" EXCEL (12' minimum, refer to manual if offsets are present)
Gas Log Provision	Yes (50,000 BTU max)
Shipping Weight:	705 pounds

Uptown 600 Fireplace Price List - Tariffs included in the prices

PRODUCT CODE	DESCRIPTION	SUGGESTED RETAIL
EF-RUP600	Includes a guillotine door, guillotine firescreen, refractory brick lining, HRS circulating air ducts and grills. Certified exclusively with 8" EXCEL Chimney, EXCEL Chimney pricing not included on this list. Requires one choice of trim.	8,675.00

REQUIRES 1 CHOICE OF TRIM

EO-RUPST	Straight Trim (for heavier masonry)	351.00
EO-RUPFT	Frame Trim (for tile or cement board finish)	526.00

OPTIONS (see options page for detailed descriptions)

HEAT RECOVERY SYSTEM (HRS)

FO-DUCT5	8" HRS Duct Extension - 5 Feet	163.00
----------	--------------------------------	--------

GRILL OPTIONS

EO-08LLG-IN	Long Linear Intake Grill	351.00
EO-08LLG-OUT	Long Linear Outlet Grill	263.00

UPTOWN 600 IS APPROVED FOR MASONRY CHIMNEY INSTALLATIONS

FO-FDM8	Masonry Chimney Adapter	154.00
---------	-------------------------	--------

CHIMNEY


SEE EXCEL CHIMNEY PRICE LIST



Linear 50 Fireplace



Contemporary Wood Burning at its Finest



TECHNICAL SPECIFICATIONS

Not tested to ASTM 2558

EPA Emissions:	The Linear 50 can be sold in Canada and the USA since it is not regulated as per the rule definition of "fireplace" under Subpart AAA of the 2015 EPA Standards of Performance for New Residential Wood Heaters Vol. 80, No. 50.
Size of Firebox:	44 1/2"W x 14"D
HRS (Heat Recovery System)	Two 13 1/2" x 8 3/8" inlet wall grills (included) & Two 13 1/2" x 6" outlet wall grills (included)
Maximum Log Size:	24"
Door & Screen	Counterweighted Guillotine System
Glass Viewing Area:	45 7/8"W x 15 3/8"H
Venting:	10" RIS (12' minimum height, refer to manual if offsets are present)
Gas Log Provision	Yes
Shipping Weight:	1,130 pounds

Linear 50 Fireplace Price List - Tariffs included in the prices


PRODUCT CODE	DESCRIPTION	SUGGESTED RETAIL
EF-RL50	Includes a guillotine-style ceramic glass door, guillotine firescreen, refractory brick lining, HRS circulating air ducts and grills. Certified exclusively with 10" RIS Chimney	12,200.00
OPTIONS (see options page for detailed descriptions)		
HEAT RECOVERY SYSTEM (HRS)		
EO-DUCT	8" HRS Duct Extension - 5 Feet	272.00
GRILL OPTIONS		
EO-LLG-IN	Long Linear Intake Grill	369.00
EO-LLG-OUT	Long Linear Outlet Grill	281.00
EO-SG	Square Grills for 8' Ceiling	272.00
CHIMNEY		
SEE RIS PRICE LIST FOR 10"		

Linear 50 Grills



Rectangular Grills
Two 13 1/2" x 8 3/8" inlet and two 13 1/2" x 6" outlet grills are provided with each unit.

Brick lining included

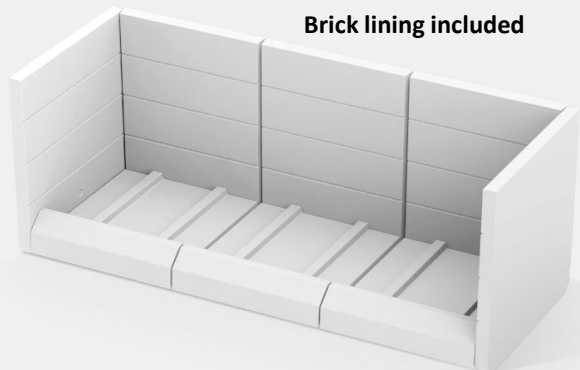




Rumford 1000C Fireplace



Fire Unlike any Other :

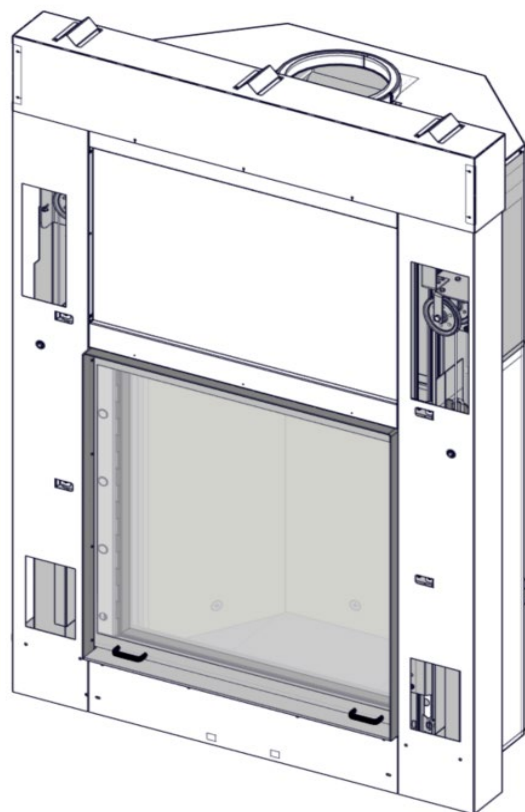

TECHNICAL SPECIFICATIONS

Emissions:	EPA Phase 2 Qualified at 3.0 grams/kg of wood burned
	EPA Qualified as per test protocol ASTM 2558 "Standard test method for determining particulate matter emissions from fires in low mass wood-burning fireplaces".
	The Rumford 1000 can be sold in Canada and the USA since it is not regulated as per the rule definition of "fireplace" under Subpart AAA of the 2015 EPA Standards of Performance for New Residential Wood Heaters Vol. 80, No. 50.
Size of Firebox:	27 1/2"W front 13 1/2"W back 12 3/4" deep
Maximum Log Size:	The shape of the Rumford firebox is not square, therefore depending upon where and how you place your logs, different sized pieces may fit. Laid flat, 20" logs will fit nicely at the front of the firebox, but only 13" logs will fit at the back. Most people stack the logs upright against the back of the firebox.
Door & Screen	Counterweighted Guillotine System
Glass Viewing Area:	29 1/2"W x 31 1/2"H
Venting:	Certified exclusively with 10" RIS Chimney. (12' minimum, refer to manual if offsets are present)
Gas Log Provision	Yes (70,000 BTU max)
Certified in Masonry:	NO
Shipping Weight :	720 pounds

Rumford 1000C Fireplace Price List - Tariffs included in the prices


PRODUCT CODE	DESCRIPTION	SUGGESTED RETAIL
EF-RR1000C	Rumford 1000C Fireplace - Body only c/w guillotine door and screen. Requires 1 choice of Firebox Lining	9,275.00
RUMFORD 1000C FIREBOX LINING		
EO-RB1000	Refractory Brick* for RR1000 - Running Bond Pattern	1,003.00
EO-VP1000	Vermiculite Panel** for RR1000 - Herringbone Pattern	1,841.00
* Maximum Durability		
** Lower emissions & faster startup		
OPTIONS (see options page for detailed descriptions)		
GRAVITY VENTS		
FO-INT	Outside Air Kit - 4" Diameter	184.00
CHIMNEY		
SEE RIS PRICE LIST FOR 10"		



Rumford 1500C Fireplace



It is the ultimate in size and performance

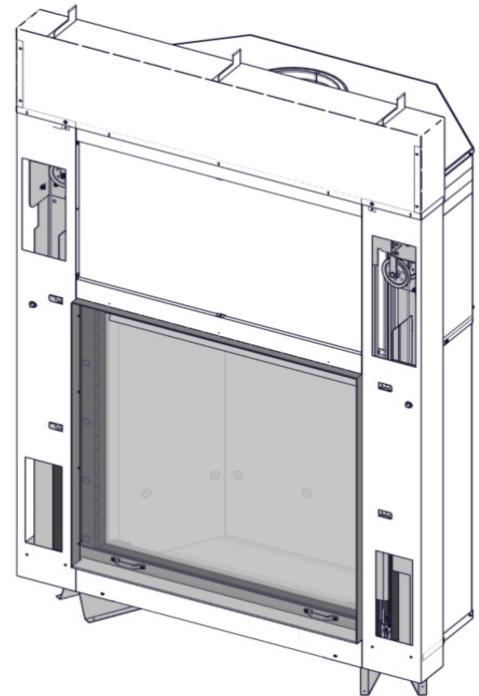

TECHNICAL SPECIFICATIONS

Emissions:	EPA Phase 2 Qualified at 3.4 grams/kg of wood burned
	EPA Qualified as per test protocol ASTM 2558 "Standard test method for determining particulate matter emissions from fires in low mass wood-burning fireplaces".
	The Rumford 1500 can be sold in Canada and the USA since it is not regulated as per the rule definition of "fireplace" under Subpart AAA of the 2015 EPA Standards of Performance for New Residential Wood Heaters Vol. 80, No. 50.
Size of Firebox:	35 1/2" W front 21 3/4"W back 13" deep
Maximum Log Size:	24" maximum. The shape of the Rumford firebox is not square, therefore depending upon where and how you place your logs, different sized pieces may fit. Laid flat, 20" logs will fit nicely at the front of the firebox, but only 13" logs will fit at the back. Most people stack the logs upright against the back of the firebox.
Door & Screen	Counterweighted Guillotine System
Glass Viewing Area:	37 1/4"W x 36 1/2"H
Venting :	Certified exclusively with 12" RIS Chimney (12' minimum, refer to manual if offsets are present)
Gas Log Provision	Yes (100,000 BTU max)
Certified in Masonry:	NO
Shipping Weight:	1085 pounds

Rumford 1500C Fireplace Price List - Tariffs included in the prices

PRODUCT CODE	DESCRIPTION	SUGGESTED RETAIL
EF-RR1500C	Rumford 1500C Fireplace - Body only c/w guillotine door and screen. Requires 1 choice of Firebox Lining	14,300.00

RUMFORD 1500C FIREBOX LINING

EO-RB1500	Refractory Brick* for RR1500 - Running Bond Pattern	1,289.00
EO-VP1500	Vermiculite Panel** for RR1500 - Herringbone Pattern	2,393.00

* Maximum Durability

** Lower emissions & faster startup

OPTIONS (see options page for detailed descriptions)

GRAVITY VENTS

FO-INT	Outside Air Kit - 4" Diameter	184.00
--------	-------------------------------	---------------

CHIMNEY

SEE RIS PRICE LIST FOR 12"




Renaissance Option Descriptions

FIREBOX LINING

Refractory Brick for RR1000 - Running Bond Pattern

EO-RB1000


Maximum Durability



Vermiculite Panel for RR1000 - Herringbone Pattern

EO-VP1000


Lower emissions & faster startup



Refractory Brick for RR1500 - Running Bond Pattern

EO-RB1500

Maximum Durability



Vermiculite Panel for RR1500 - Herringbone Pattern

EO-VP1500

Lower emissions & faster startup




TRIMS & GRILLS

RUP600 Straight Trim (for heavier masonry)

EO-RUPST


The Straight Trim projects straight out the front opening of the fireplace by 3/4" when installed. If the finishing material is thick (e.g. brick, stone, etc.), it will provide a finished edge to butt against.



RUP600 Frame Trim (for tile or cement board finish)

EO-RUPFT


The Frame Trim partially overlaps the wall and covers the edge where the finishing meets the fireplace. It is ideal for installations finished with thin materials (e.g. tile, cement board, etc.).



RL50 Long Linear Intake Grill

EO-LLG-IN


This long air Inlet grill (52 1/2" x 6") replaces the two rectangular air inlet grills provided with the Linear 50.

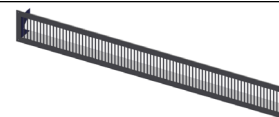

RL50 Long Linear Outlet Grill

EO-LLG-OUT

This long air Outlet grill (52 1/2" x 6") replaces the two rectangular Hot Air Outlet grills provided with the Linear 50.



RUP600 Long Linear Intake Grill


EO-08LLG-IN

This long air Inlet grill (37" x 6") replaces the two rectangular air inlet grills provided with the Uptown.




RUP600 Long Linear Outlet Grill**EO-08LLG-OUT**

This long air Outlet grill (37" x 6") replaces the two rectangular Hot Air Outlet grills provided with the Uptown.

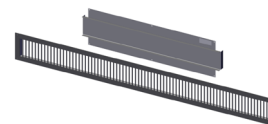

RL50 Square Grills for 8' Ceiling**EO-SG**

These 13" grills are required for installation in a room with a ceiling between 8' and 9' high. They replace the rectangular hot air outlet grills provided with the Linear Fireplaces. Includes (1) 13" x 13" contemporary grill and screws for installation



HEAT RECOVERY SYSTEM (HRS) OPTIONS

RUP600 8" HRS Duct Extension - 5 Feet**FO-DUCT5**

Provides 5 additional feet of 8" insulated flexible duct to be used with the Uptown 600. Refer to the Uptown 600 installation instructions and respect the maximum duct length of 15 feet in total.



RL50 10" HRS Duct Extension - 5 Feet**EO-DUCT**


Provides 5 additional feet of 8" insulated flexible duct to be used with the Linear 50. Refer to the Linear 50 installation instructions and respect the maximum duct length of 15 feet in total.



MISCELLANEOUS OPTIONS

Masonry Chimney Adapter**FO-FDM8**

Permits the Uptown 600 to convert to a stainless liner for re-lining a masonry chimney. Attach to the liner with 3 stainless steel rivets (provided) and to the EXCEL chimney with 3 screws (provided).



Outside Air Kit - 4" diameter**FO-INT**

Brings outside combustion air to the fireplace. Includes 10' of 4" diameter insulated aluminum duct and a register for the outside wall. Applicable to all models



UPTOWN 600 FIREPLACE

Includes a guillotine-style ceramic glass door & firescreen, refractory brick lining, HRS ducts and grills.

EF-RUP600 8,675.00

LINEAR 50 FIREPLACE

Includes a guillotine-style ceramic glass door & firescreen, refractory brick lining, HRS ducts and grills.

EF-RL50 12,200.00

RUMFORD 1000C FIREPLACE - Body only

Body only c/w guillotine door and screen. Requires 1 choice of Firebox Lining

EF-RR1000C 9,275.00

RUMFORD 1500C FIREPLACE - Body only

Body only c/w guillotine door and screen. Requires 1 choice of Firebox Lining

EF-RR1500C 14,300.00

FIREPLACE OPTIONS
FIREBOX LINING

Refractory brick for RR1000C	EO-RB1000	1,003.00			X	
Vermiculite panels for RR1000C	EO-VP1000	1,841.00			X	
Refractory brick for RR1500C	EO-RB1500	1,289.00				X
Vermiculite panels for RR1500C	EO-VP1500	2,393.00				X

TRIMS & GRILLS

Straight Trim (for heavier masonry)	EO-RUPST	351.00	X			
Frame Trim (for tile or cement board finish)	EO-RUPFT	526.00	X			
Long Linear Intake Grill	EO-LLG-IN	369.00		X		
Long Linear Outlet Grill	EO-LLG-OUT	281.00		X		
Long Linear Intake Grill	EO-08LLG-IN	351.00	X			
Long Linear Outlet Grill	EO-08LLG-OUT	263.00	X			
Square Grills for 8' Ceiling	EO-SG	272.00		X		

HEAT RECOVERY SYSTEM (HRS) OPTIONS

RUP600 8" HRS Duct Extension - 5 Feet	FO-DUCT5	163.00	X			
RL50 10" HRS Duct Extension - 5 Feet	EO-DUCT	272.00		X		

MISCELLANEOUS OPTIONS

Masonry Chimney Adapter	FO-FDM8	154.00	X			
Outside Air Kit - 4" diameter	FO-INT	184.00			X	X



Heat Recovery
System (HRS)